




CHUANGYUAN TECHNOLOGES (HK) LIMITED

TO-92 Encapsulate Adjustable Reference Source

TL431 Adjustable Accurate Reference Source

FEATURES

The output voltage can be adjusted to 36V
Low dynamic output impedance, its typical value is 0.2Ω
Trapping current capability is 1 to 100mA
The typical value of the equivalent temperature factor in the whole temperature scope is $50 \text{ ppm}/^\circ\text{C}$
The effective temperature compensation in the working range of full temperature
Low output noise voltage
Fast on -state response

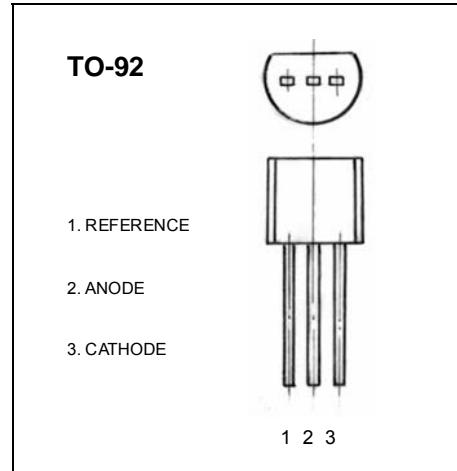

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	SYMBOL	VALUE	UNITS
Cathode Voltage	V_{KA}	37	V
Cathode Current Range (Continuous)	I_{KA}	-100~+150	mA
Reference Input Current Range	I_{ref}	0.05~+10	mA
Power Dissipation	P_D	770	mW
Operating temperature	T_{opr}	0~70	°C
Storage temperature Range	T_{stg}	-65~+150	°C

ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Reference Input Voltage	V_{ref}	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}$	2.475	2.5	2.525	V
Deviation of reference input Voltage Over temperature (note)	$\Delta V_{ref}/\Delta T$	$V_{KA}=V_{REF}, I_{KA}=10\text{mA}$ $T_{min} \leq T_a \leq T_{max}$		4.5	17	mV
Ratio Of Change in Reference Input Voltage to the change in Cathode Voltage	$\Delta V_{ref}/\Delta V_{KA}$	$I_{KA}=10\text{mA}$	$\Delta V_{KA}=10\text{V} \sim V_{REF}$		-1.0	mV/V
			$\Delta V_{KA}=36\text{V} \sim 10\text{V}$		-0.5	mV/V
Reference Input Current	I_{ref}	$I_{KA}=10\text{mA}, R_1=10\text{K}\Omega$ $R_2=\infty$		1.5	4	μA
Deviation Of Reference Input Current Over Full Temperature Range	$\Delta I_{ref}/\Delta T$	$I_{KA}=10\text{mA}, R_1=10\text{K}\Omega$ $R_2=\infty$ $T_A=\text{full Temperature}$		0.4	1.2	μA
Minimum cathode current for regulation	$I_{KA}(\min)$	$V_{KA}=V_{REF}$		0.45	1.0	mA
Off-state cathode Current	$I_{KA}(\text{OFF})$	$V_{KA}=36\text{V}, V_{REF}=0$		0.05	1.0	μA
Dynamic Impedance	Z_{KA}	$V_{KA}=V_{REF}, I_{KA}=1 \text{ to } 100\text{mA}$ $f \leq 1.0\text{KHz}$		0.15	0.5	Ω

Note: $T_{MIN}=0^\circ\text{C}$, $T_{MAX}=+70^\circ\text{C}$

CLASSIFICATION OF V_{ref}

Rank	TL431	TL431 A	TL431 B
Range	2.487-2.512	2.475-2.525	2.450-2.550